

OS5 high pressure swivel & clamp cylinders



OS5

Feature

- OS5 product is a specially enhanced design to fit for high working pressure 210 kgf/cm²

Spec.

bore(mm)	32	40
acting	double acting	
swivel angle	90°	
swivel direction	left(L) or right(R)	
swivel stroke(mm)	15	
clamp stroke(mm)	18	
fluid	oil mineral	
max. working pressure (kgf/cm ²)	50-210	

Order form

OS5 S — R — 40


① ② ③

OS5 : high pressure swivel and clamp cylinders


①	mounting	(1) OS5S : flange (2) OS5T : threaded
②	type	(1) R : right turn with clock wise direction (2) L : left turn with counter clockwise direction
③	bore(mm)	32 、 40

External dimensions

● OS5S flange

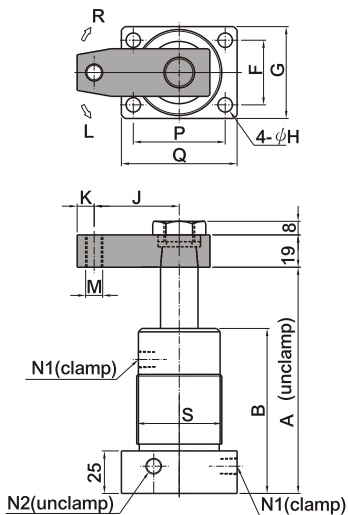

● OS5T thread

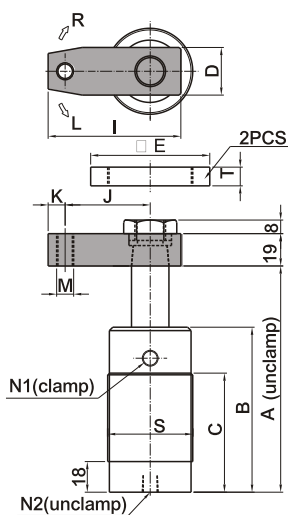

not bore	A	B	C	D	E	F	G	H	I	J	K	M	N1	N2	P	Q	S	T
φ32	133	97	70	38	70	34	54	8.5	78	50	10	M12 × 1.75	RC1/8	RC1/8	54	68	M50 × 1.5	11
φ40	134	98	72	38	80	40	64	8.5	78	50	10	M12 × 1.75	RC1/8	RC1/8	66	84	M60 × 1.5	11

GENTLE AUTOMATIC SOLUTION SDN BHD

No.36, Jalan Industri USJ 1/13, Taman Perindustrian USJ 1, 47600 Subang Jaya, Selangor.

TEL: 603-8023 7743 / 8743 FAX: 603-8023 9743

email:sales@gentle.com.my / gpauto@tm.net.my